Technical Specifications

Motion detection range	8m / 26.25ft (At height of 3m / 9.84ft)
Viewing angle	110°
Field of View	360°
Power Supply	12...24VDC SELV
Power Consumption	Approx. 115mW
Ambient Temperature	-30...75°C / -22...167°F (SELV powered)
Brightness sensor	0...188.000Lux
Humidity	95% r.H. (non condensing)
Safety Protection	IP20
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

LOXONE

No Gimmicks.
Real Smart Homes.

Need Help?

loxone.com/support

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com

LOXONE

Motion Sensor Tree

Part No.: 100223 (white)
Part No.: 100224 (anthracite)

About the product

The Loxone Motion Sensor is used to detect motion and brightness for home and similar non safety critical applications.

Features

- Motion Detection
- Brightness Detection

Installation

Install the mounting ring on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config. To finish the installation attach the Loxone Motion Sensor on the mounting ring.

Connection

Wire Diameter	0.25...0.8mm² / AWG23...AWG18
Exposed Wire Length	5mm / 0.2"
Push-In-Technology	To make connection, insert the wire; to remove the wire twist and pull at the same time.

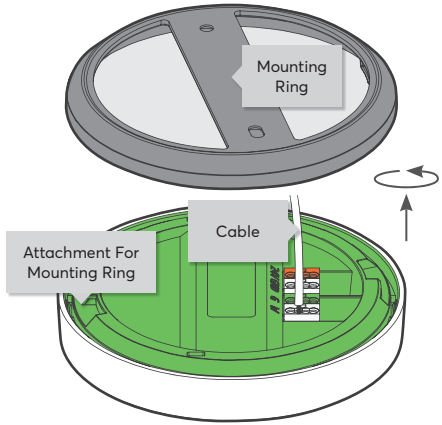

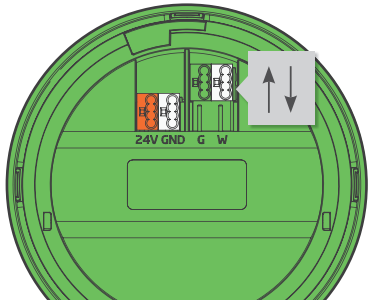

For additional information, declaration of confirmity, visit www.loxone.com/help/motion-sensor-tree