

Technical Specifications

| | |
|------------------------|--|
| Access Possibilities | NFC, Key Code |
| Power Supply | 9...28VDC SELV/PELV |
| Power Consumption | typ. 0.05W, max. 0.8W (while reading NFC) |
| Safety Rating | IP44 |
| Ambient Temperature | -20...55°C / -4...131°F |
| Humidity | 95% r.H. (non condensing) |
| Maintenance & Cleaning | This device is free of maintenance and may only be cleaned with a dry cloth. |

Connection

| | |
|---------------------|--|
| Wire Diameter | 0.32...0.08mm ² / AWG22... AWG28 |
| Exposed Wire Length | 3.5mm / 0.14" |
| Push-In Technology | To make connection, insert the wire; to remove the wire twist and pull at the same time. |

LOXONE

No Gimmicks.
Real Smart Homes.

Need Help?

loxone.com/support

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com





LOXONE

NFC Code Touch Tree

Part No.: 100300 (white)

Part No.: 100306 (anthracite)



About the product

Get access to your Smart Home with encrypted or unencrypted NFC tags, via your NFC enabled smartphone or through your own unique key code.

Features



- Authentication via encrypted and unencrypted NFC Tags or NFC enabled smartphones or key code
- Supports permanent, disposable or time-limited key codes
- Universal button
- Alarm-authentication

Important Information

For security reasons, we strongly suggest you only use encrypted NFC tags for access control from Loxone.

Installation

Install the mounting frame of the NFC Code Touch on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config. To finish the installation, attach the NFC Code Touch as shown on the mounting frame.

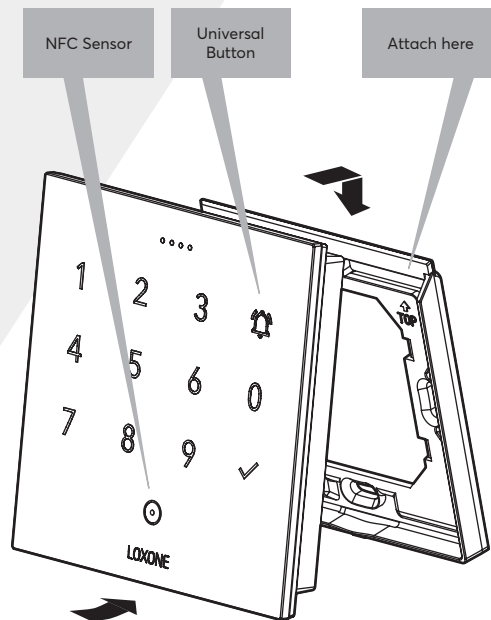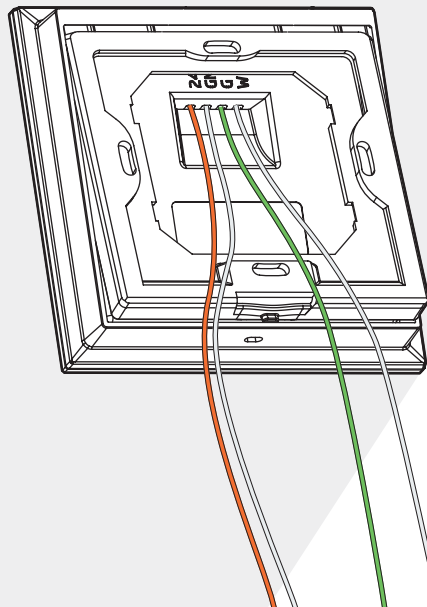

For additional information, declaration of conformity, visit www.loxone.com/help/nfc_code_touch