




High-quality front panel mand of aluminium, solid, gross-polished surface, anodized.

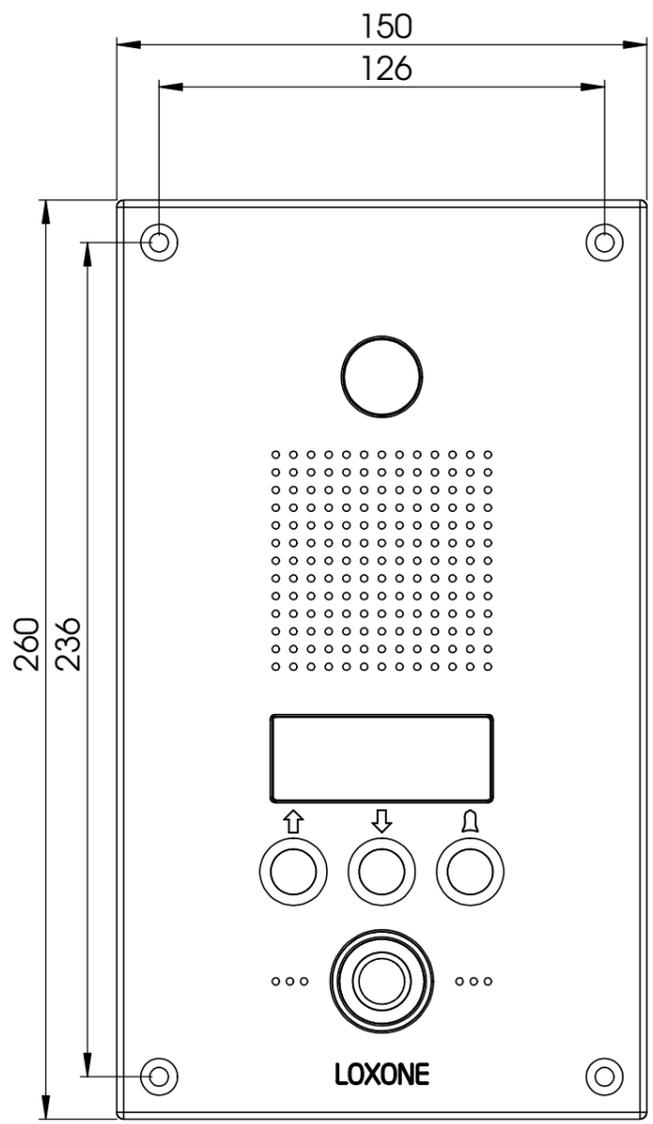

Rear side view

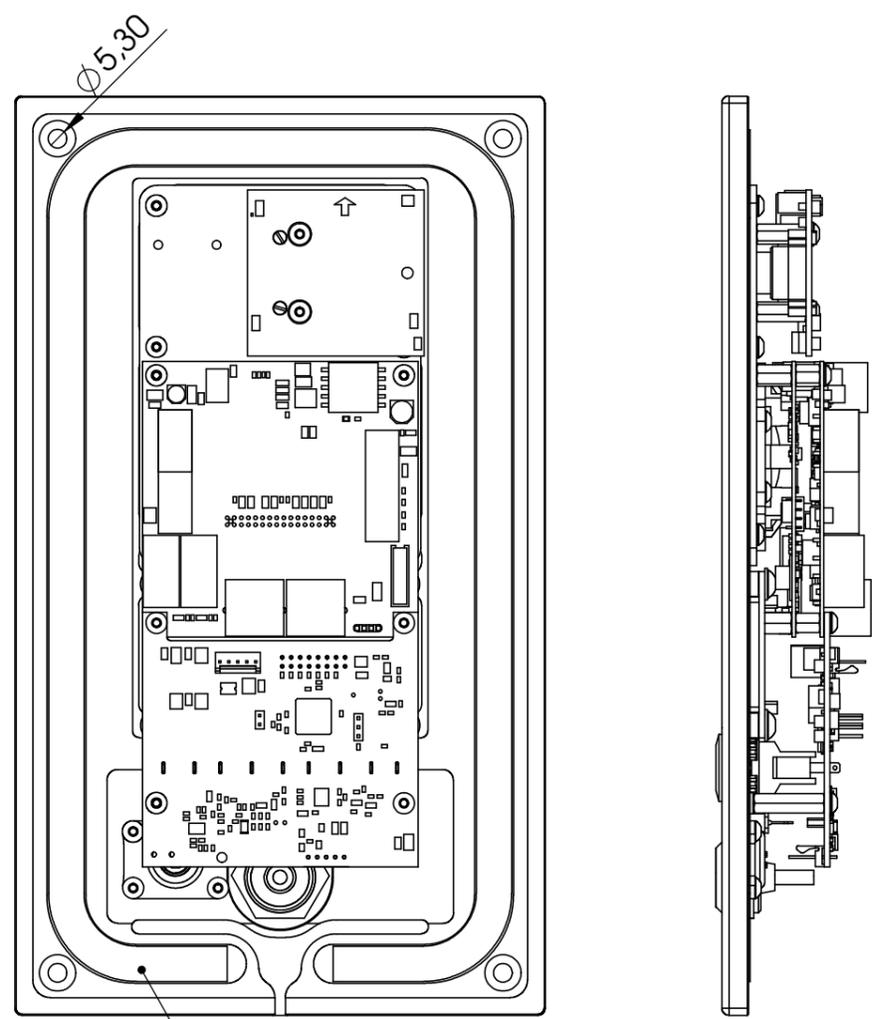

Sealing with foam rubber tape 10mm  
Circular against flush-mounted or surface-mounted box other panel cut-out

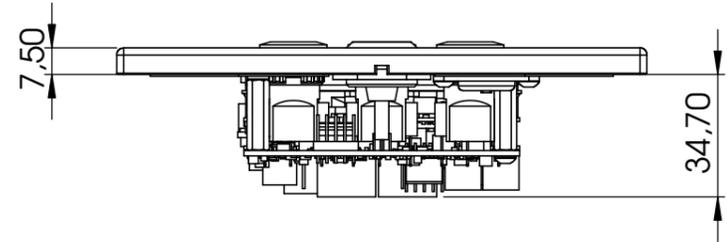

Alle Rechte ausdrücklich vorbehalten. Vervielfältigung oder Mitteilung an Dritte, gleichgültig in welcher Form, ist ohne schriftliche Genehmigung des Eigentümers nicht gestattet.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.

<p>Loxone Electronics GmbH</p>			Bezeichnung:		
			Loxone Intercom XL		
Datum	06.06.2015	06.06.2015	06.06.2015	Artikel Nummer	
Name	Ba	Ba	Ba	???????	
	erstellt	geprüft	Freigabe	Letzte Änderung: 06.06.2015	Durch: Bau
					Bl. 1/2


Alle Rechte ausdrücklich vorbehalten. Vervielfältigung oder  
 Mitteilung an Dritte, gänzlich in welcher Form, ist ohne  
 schriftliche Genehmigung des Eigentümers nicht gestattet.  
 All rights strictly reserved. Reproduction or issue  
 to third parties in any form whatever is not permitted  
 without written authority from the proprietors.

A

B


C

D

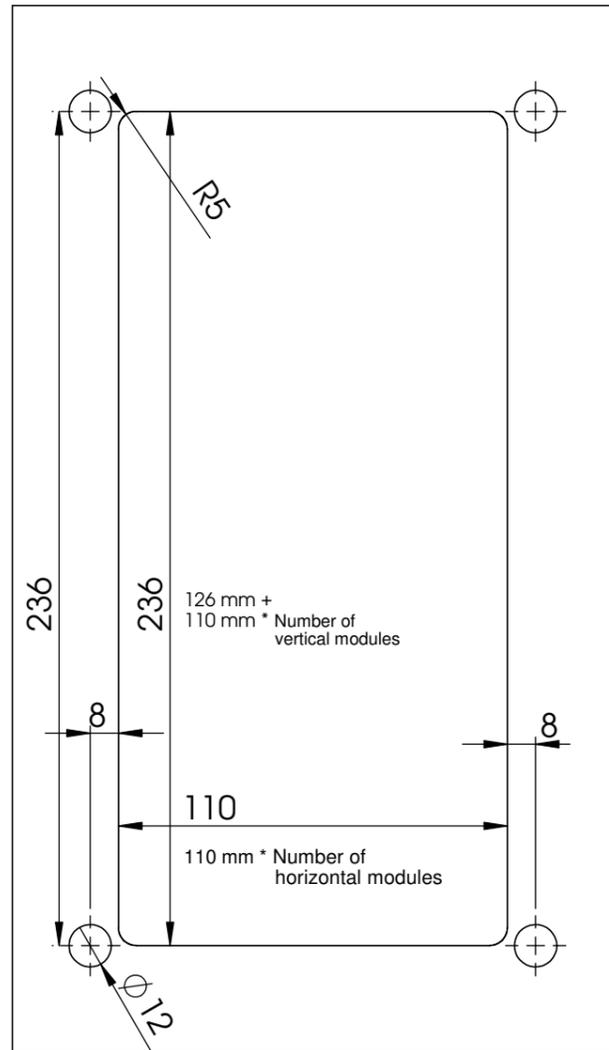


### Drilling template for wall finishing

- For chiselling: 45 mm depth
- For cavity wall installation: wall thicknesses from 6 to 25 mm possible with optional cavity wall mounting kit 33-1503




### Cavity wall mounting kit

Consists of 4 sets to brace the flush-mounted box from the back against a plaster board or a front panel.  
 Delivery is optional upon request.

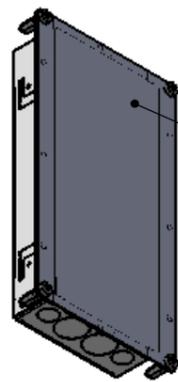

**Protective cover:**  
 The flush-mounted box is delivered with a protective cover. It protects the contact surface and already completed work before the subsequent plasterwork. Is removed before the intercom is installed.

Label for identification of mounting position

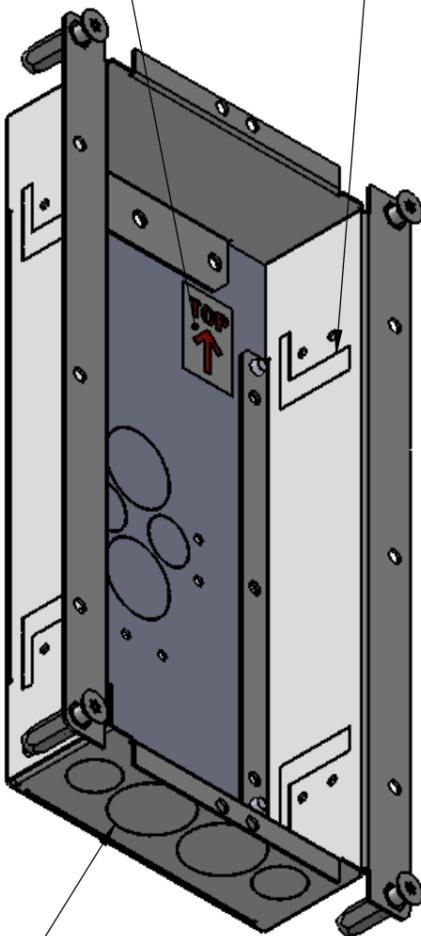


Break out the tabs before mounting the cavity wall mounting kits

All breakouts for cable entry are closed and designed as predetermined breaking points.

To open the breaking point, a flat screwdriver is applied at the rim and the breakthrough is made by a hammer stroke.

Two cable entries 16.5 mm and 26 mm respectively at the bottom and the back.


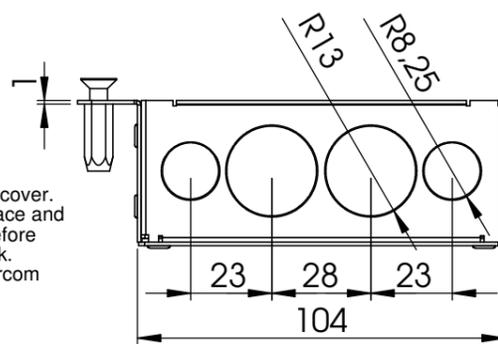


### Installation Instructions:


Rear side of the bearing surface is to be set at least flush with the final plastering. (Mounting on existing plastered surfaces is possible). The 1.0 mm thick sheet metal will be covered by the mounting frame (FB). The frame can alternatively also be flush-plastered with the front of the sheet metal.

### Sealing by outdoor installation:

Around and on the back, the front edge of the sheet metal is to be sealed with acrylic against the plaster surface. The acrylic sealing must be applied that no moisture can get in between the flush-mounted box and the wall into the mounting space. Additionally, the acrylic must be smoothed in a way that the foamed rubber seal of the mounting frame (FB) is resting on an even surface and no moisture can get in between the foamed rubber seal and the flush-mounted box through hollow spaces.

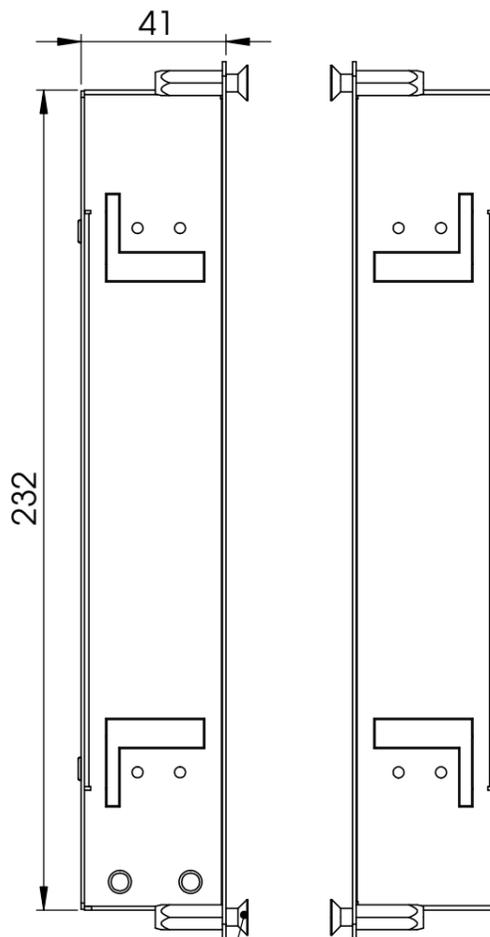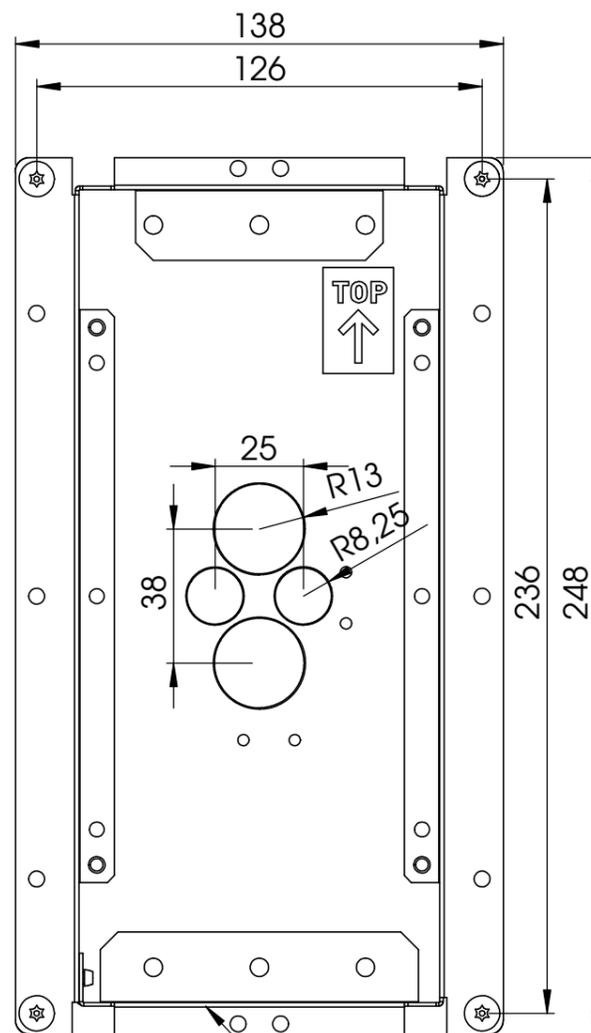

4 screws for the mounting of the video intercom are included in the delivery of the flush-mounted box.

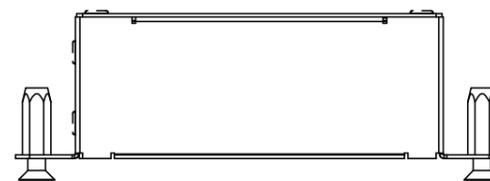

For wall installation is recommended that the flush-mounted box is bolted together with the underlying wall construction through open holes in the rear panel.

<b>LOXONE</b> Loxone Electronics GmbH			Bezeichnung: <b>Intercom Flush-Mount Box</b>	
Datum	06.06.2013	06.06.2013	06.06.2013	Artikel Nummer
Name	Ba	Ba	Ba	200094
	erstellt	geprüft	Freigabe	Letzte Änderung: 06.06.2015
			Durch: Bau	Bl: 2/2