

## Technical Specifications

<b>Max. Loxone Air devices</b>	128
<b>Antenna</b>	External stub-antenna provided
<b>Power Supply</b>	24VDC SELV
<b>Power Consumption</b>	max. 150mW
<b>Radio Frequency</b>	868MHz (SRD Band Europe), 915MHz (ISM Band Region 2) max. Power 3.16mW
<b>Ambient Temperature</b>	0...55°C / 32...131°F
<b>Humidity</b>	95% r. H. (non condensing)
<b>Safety Protection</b>	IP20
<b>Maintenance &amp; Cleaning</b>	The device is free of maintenance and may only be cleaned with a dry cloth.

# LOXONE

No Gimmicks.  
Real Smart Homes.

LOXONE



## Need Help?

[loxone.com/support](https://loxone.com/support)

# Air Base Extension

Part No.: 100114



**Loxone Electronics GmbH**  
Smart Home 1  
4154 Kollerschlag  
Austria

[loxone.com](https://loxone.com)



## About the product

Connect up to 128 Loxone Air devices using the Air Base Extension.

## Features

- 128 Air devices

## Installation


The installation of the device is to be mounted on a DIN rail in an electrical distribution housing and may only be performed by qualified personnel.

Protection against electrical contact and fire protection must be provided in the final installation by the use of a standard compliant/approved housing.

If the unit is used in a non conform manner as specified by the manufacturer the product included safeguards will be impaired.

## Connection

<b>Torque of</b> • Green • Blue terminal block	0.40Nm / 3.5lbf in 0.79Nm / 7.0lbf in
<b>Wire Diameter</b>	0.05...2.5mm <sup>2</sup> / 30...12AWG Wire must have a minimum temperature rating of 70°C / 158°F
<b>Exposed Wire Length</b>	6...7.5mm / 0.23...0.29"

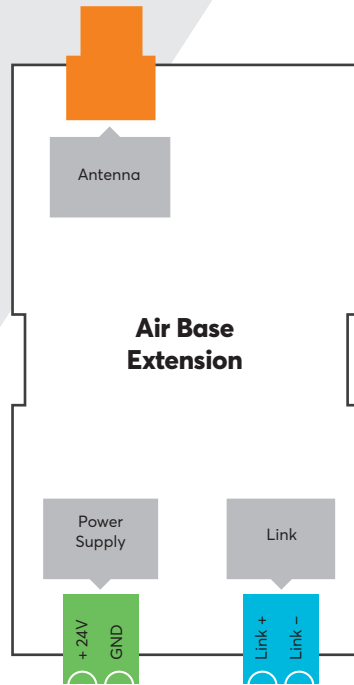

For additional information, declaration of conformity, visit [www.loxone.com/help/air-base-extension](http://www.loxone.com/help/air-base-extension)