

Technical Specifications

Power Supply & Power Consumption	5VDC (LPS) via Micro USB Connector max. 1.3W
Ambient Temperature	0...40°C / 32...104°F
Safety Rating	IP20 (when installed)
Storage Temperature	-20...60°C / -4°...140°F
Humidity	95% r.H (non condensing)
Degree Of Pollution	2
Maintenance and Cleaning	The device is maintenance-free and may only be cleaned with a dry cloth
Radio Frequency	868MHz (SRD Band Europe), 915MHz (ISM Band Region 2) max. Power 3.16mW

LOXONE

No Gimmicks.
Real Smart Homes.

LOXONE

Need Help?

loxone.com/support

Miniserver GO

Part No.: 100139

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com



About the product

The Miniserver Go is a device for the automatic control and management of home automation and similar non safety critical applications. The Loxone Miniserver Go has a fully integrated Air Base Extension and is perfect for retrofitting Loxone in existing homes.

Installation & electrical connection

Connect device only to the power supply that is shipped with the product. Do not connect the device to telecommunication networks.

If the unit is used in a non conform manner as specified by the manufacturer the product included safeguards will be impaired.

Information


Contains FCC ID: COR-ZWIR4512AC1

This device complies with part 15 of the FCC Rules.


Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation

Specifications

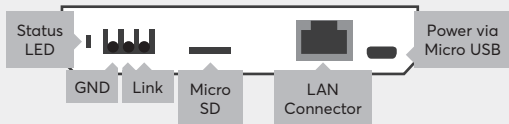

Connect Extension

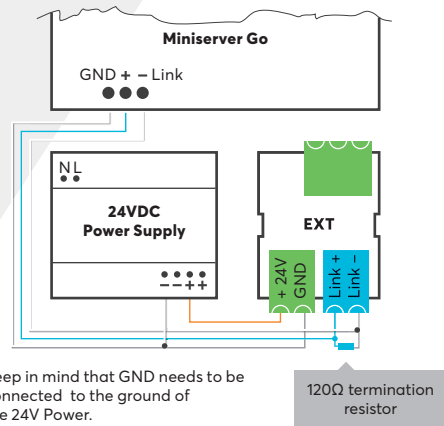

For additional information, declaration of conformity, visit www.loxone.com/help/miniserver-go