## **Supply & Power**

Supply Voltage	1826VDC
Power Consumption	1.5W (Standby) 35W (Peak)

### Interfaces

Tree Turbo	Connection with Audioserver or Miniserver Compact
Master-Client Interface (MCI)	up to 20 speaker clients per Master up to 30m wire length between clients up to 600m total length Wiring: Twisted pair, Line topology
Wireless	Bluetooth: Input V4.2

### **Ambient Conditions**

Temperature	-1050°C / 14122°F
Humidity	max. 95% r.H. (non condensing)
Ingress Protection	IP20

## **Connecting Terminals**

	24VDC	Tree Turbo, MCI
Wire cross-section	12.5mm² AWG1712	0.280.8mm² AWG2318
Stripping length	10mm / 0.39"	56mm / 0.20.24"
Temperature resistance	-4070°C -40158°F	-40105°C -40221°F

## **Audio Specifications**

Class-D Amplifier35W nominal power 70W peak powerFrequency Range45 28000HzCrossover Frequency2100HzSPL105dB @1m max.Woofer Ø178mm / 7"Tweeter Ø28mm / 1.1"	Speaker Type	2-Way active speaker
Crossover Frequency         2100Hz           SPL         105dB @1m max.           Woofer Ø         178mm / 7"	Class-D Amplifier	•
SPL         105dB @1m max.           Woofer Ø         178mm / 7"	Frequency Range	45 28000Hz
Woofer Ø 178mm / 7"	Crossover Frequency	2100Hz
	SPL	105dB @1m max.
<b>Tweeter Ø</b> 28mm / 1.1"	Woofer Ø	178mm / 7"
	Tweeter Ø	28mm / 1.1"

### **Dimensions**

Total Ø x D	232.2 x 95.1mm / 9.14 x 3.74"
Hole cut out size Ø	203mm / 8"
Installation depth	93mm / 3.66"
Max panel thickness	36mm / 1.41"
Weight	1.93kg

#### Contains FCC ID: 2ACML-201850

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference.

2. This device must accept any interference received, including interference that may cause undesired operation.



Loxone
Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information, declaration of conformity, visit www.loxone.com/datasheets

Need Help?
loxone.com/support



Install
Speaker 7
Master

LOXONE

Part No.: 610149

## **About the product**


The Install Speaker 7 Master impresses with its outstanding audio qualities and its numerous possible use cases. It is connected directly via Tree Turbo to an Audioserver or Miniserver Compact and is able to transmit the audio signal to a chain of up to 20 client speakers. In this way, it forms a flexible audio solution scalable to any building size.

## Features:

- Full integration into the Loxone System
- countless features like text-to-speech, doorbell, alarms, or audio notifications
- Music Streaming via Bluetooth

## **Safety Instructions**

Installation must be carried out by a qualified electrician in accordance with the applicable regulations. The device has to be fitted in accordance with building regulations for electrical and fire safety. The device is free of maintenance and must only be cleaned with a dry cloth. The device must not be used as part of safety-critical systems. Install the speaker in a way that the electronics on the back are protected from contact, damage, dirt and moisture.

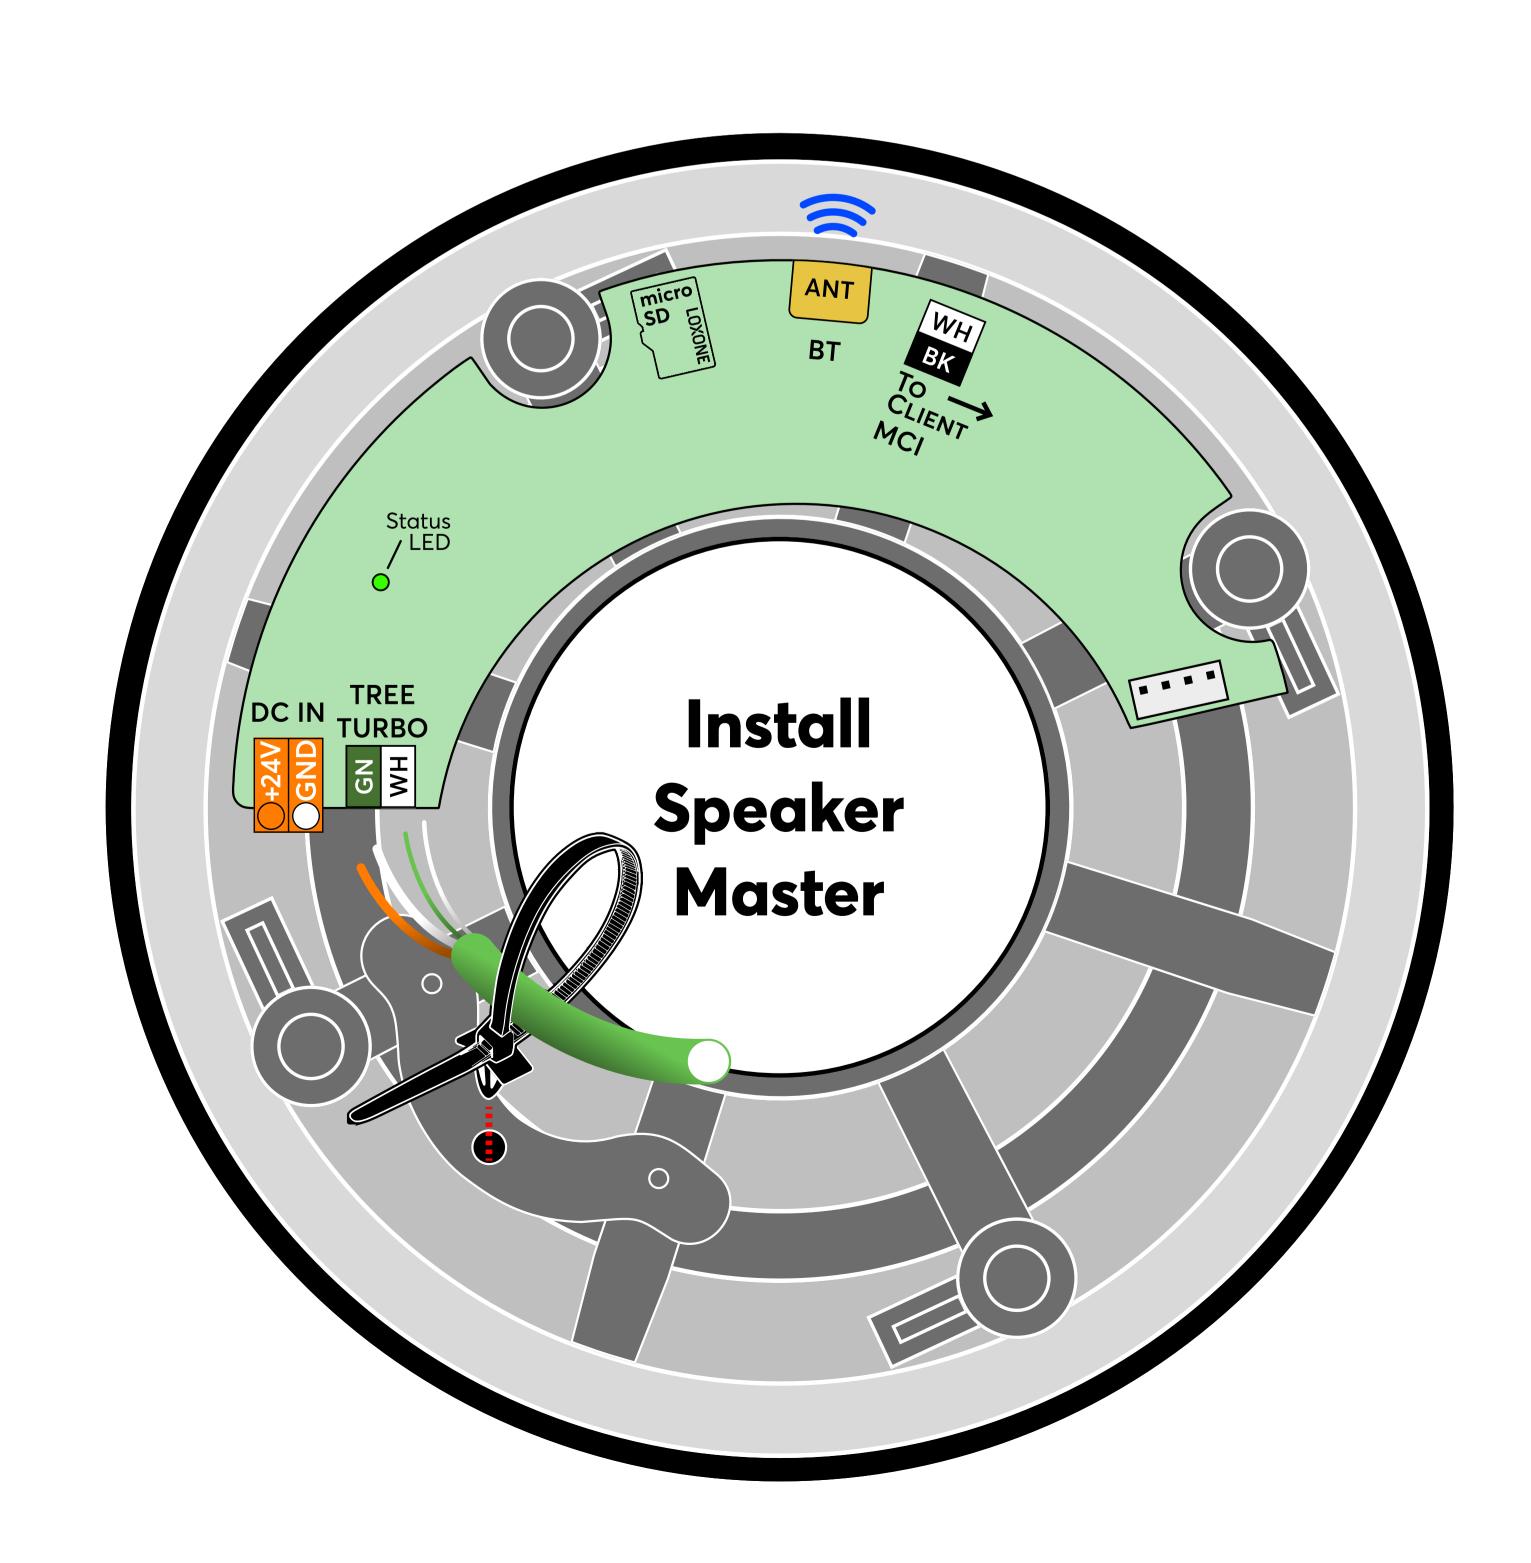

# Audioserver, MS Compact

