

Technical Specifications

Power supply	4.4 ... 5.25VDC via included micro USB power supply
Power consumption	typ. 0.94W, max. 2.65W
Power loss	2.65W
Interface	<p>Loxone Air: 868MHz (SRD Band Europe), 4 channels available max. Power 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels available max. Power 13.2mW internal antenna</p> <p>Loxone Link: connection with up to 30 Extensions LAN: 100Mbps, IPv4/IPv6, HTTPS, SSL/TLS</p>
Ambient temperature	0 ... 40°C / 32 ... 104°F
Humidity	max. 95% r.H. (non condensing)
Safety rating	IP20
Dimensions	90x90x20mm / 3.54x3.54x0.79" (LxWxH)
Maintenance and cleaning	The device is free of maintenance and may only be cleaned with a dry cloth.


LOXONE

**Loxone
Electronics GmbH**
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets



RECOGNIZED
COMPONENT



V251023

BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International. The BTL logo is a registered trademark of BACnet International.



LOXONE



Miniserver Go

Part No: 100336



About the product

The Miniserver Go is a device for the automatic control and management of home automation and similar non safety critical applications. The Loxone Miniserver Go has a fully integrated Air Base Extension and is perfect for retrofitting Loxone in existing homes.

Installation & electrical connection

If the unit is used in a non conform manner as specified by the manufacturer the product included safeguards will be impaired.

Information

Contains FCC ID: 2ARRV-000375

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation


Loxone Link Connection

Wire cross-section	0.2 ... 1.5 mm ² / AWG24 ... 16
Striping length	8mm / 0.31"
Temperature resistance	-40 ... 105°C / -40 ... 221°F


Micro USB Connector

Connector type	Micro USB 2.0 Type B
----------------	----------------------

Specifications

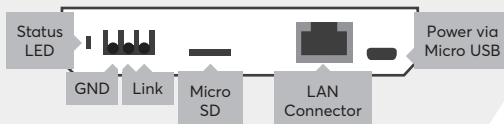

Connect Extension

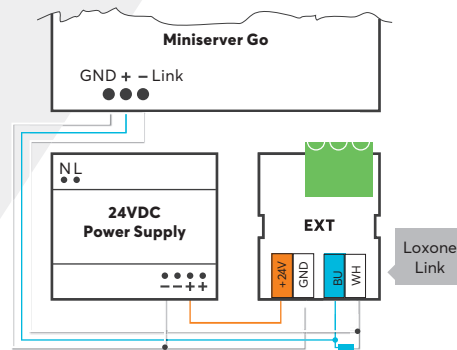

Keep in mind that GND needs to be connected to the ground of the 24V Power.

Please use the 120 Ohm resistor at the last Extension which is connected to the Loxone Link.



This folder is a part of the product!

For additional information, declaration of conformity, visit www.loxone.com/help/miniserver-go