

LOXONE SMART HOME

AUTOPILOT LIVING



Dumb Home



Loxone Miniserver



Smart Home

FIND MORE LOXONE
AIR PRODUCTS:
www.loxone.com/air

NEED HELP?
For further information and documentation please
visit: www.loxone.com/help/air



LOXONE Smart Home

GET IN TOUCH!
office@loxone.com
www.loxone.com/contact

www.loxone.com



DOOR & WINDOW CONTACT AIR

Part No.: 100210 (white)
Part No.: 100213 (anthracite)



Technical Specifications

Power Supply	CR2032 Lithium Battery
Expected Battery Lifetime	>2 years
Indoor Range	up to 30m
Ambient Temperature	0°C...55°C
Safety Rating	IP20
Frequency	FCC-ID: COR-ZWIR4512AC1 868MHz (SRD band Europe) 915MHz (ISM band region 2)
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

Features

- supports Loxone Air technology

About the product

The Loxone Window & Door Contact will quickly detect any open windows or doors in your smart home and similar non safety critical applications.

Installation & electrical connection

If the device is not installed according to manufacturers guidelines the protection of the device may be affected.



For additional information, visit
www.loxone.com/help/air




Information

Contains FCC ID: COR-ZWIR4512AC1

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. *This device may not cause harmful interference*
2. *This device must accept any interference received, including interference that may cause undesired operation*

Learn Button / Slide to eject battery

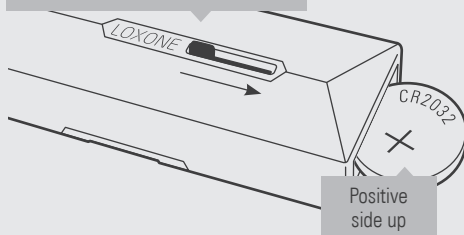

Positive side up

