

LOXONE SMART HOME. AUTOPILOT LIVING.



NEED HELP?

For further information and documentation
please visit: www.loxone.com/help/tree



LOXONE Smart Home

FIND MORE LOXONE
TREE PRODUCTS:
www.loxone.com/tree

GET IN TOUCH!
office@loxone.com
www.loxone.com/contact



VALVE ACTUATOR TREE

Part No.: 100225



Technical Specifications

Power Supply	24VDC SELV (min. 9VDC max. 28VDC)
Power Consumption	max. 1.5W
Ambient Temperature	0°C...55°C
Humidity	80% r.H (non condensing)
Safety Rating	IP20
Valve Adapter	VA80
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.


Features

- supports Loxone Tree technology

Electrical Connection

IDC-Technology	The wires of a cable are pressed into a single insulation cutting terminal. This connection technique works without soldering, screwing and stripping.
-----------------------	--

Wire Diameter	0.258mm ² ...0.340mm ²
Outer Diameter	1.1mm...1.6mm cable must be specified for min. 70°C
Push Force	min. 70N

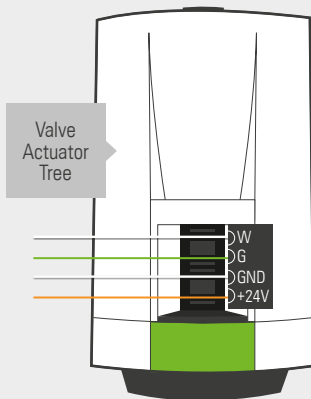

About the product

The Loxone Valve Actuator Tree is a device for automatic actuation and control of home automation (in conjunction with the miniserver) and similar nonsafetycritical applications.

Installation & electrical connection

Mounting of the equipment must be performed by a qualified technician. During mounting and in case of error a separator (at least 4A) must be present to turn off the supply. The separator must be easily accessible and recognizable.



For additional information, visit www.loxone.com/help/tree

