

Datasheet

Remote Air

Part No: 100140




About the product

The Loxone Remote Air is a compact remote control with 5 buttons.

Electrical Data

Power supply	CR2032 battery
Power consumption	typ. 3.5µA, max. 15mA
Power loss	max. 15mA
Interfaces	Loxone Air: 868MHz (SRD Band Europe), 4 channels available 915MHz (ISM Band Region 2), 10 channels available max. Power 3.16mW
Battery lifetime	up to 2 years
Ambient temperature	-20 ... 60°C / -4 ... 140°F
Humidity	max. 95% r.H. (non condensing)
Touch points	5 touch points

Connection Diagram

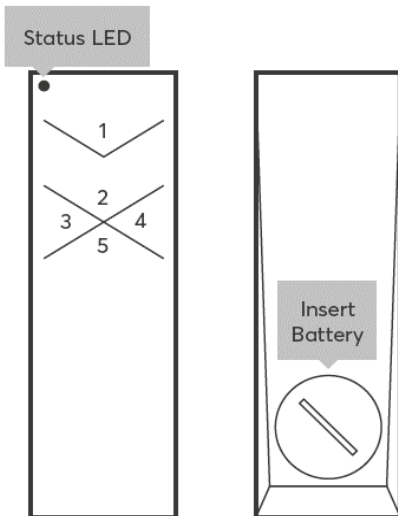


Product Characteristics

Colours	Black: RAL9005
Finish	Matte


Weight & Dimensions

Net weight	28g
Total weight	55g
Product dimensions	106x34x10.5mm / 4.2x1.34x0.41" (LxWxH)

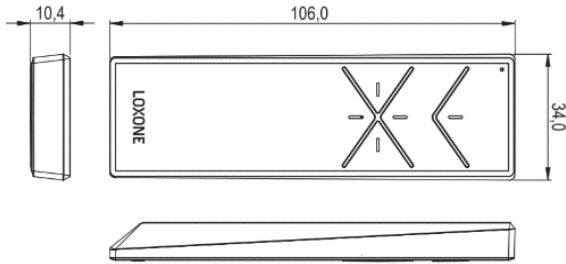

Pack size	123,5x84x27mm / 4.86x3.31x1.06" (LxWxH)
-----------	---

Certifications & Standards

Safety rating	IP20
Certifications	


Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Datenblatt

Remote Air

Art. Nr. 100140




Information zum Produkt

Die Loxone Remote Air ist eine kompakte Funkfernbedienung mit 5 Tasten.

Elektrische Daten

Spannungsversorgung	CR2032 batterie
Leistungsaufnahme	typ. 3,5µA, max. 15mA
Leistungsverlust	max. 15mA
Schnittstellen	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 3,16mW
Batterie Lebensdauer	bis zu 2 Jahre
Umgebungstemperatur	-20 ... 60°C / -4 ... 140°F
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
Tastpunkte	5 Tastpunkte

Anschlussplan

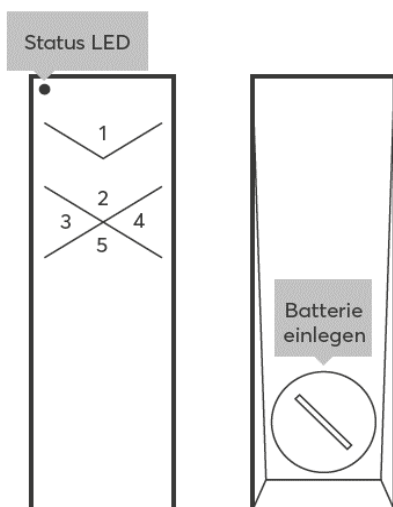


Produkteigenschaften

Farbe	Schwarz: RAL9005
Glanzgrad	Matt

Gewicht & Abmessungen

Nettogewicht	28g
Bruttogewicht	55g
Produktmaße	106x34x10,5mm / 4,2x1,34x0,41" (LxBxH)

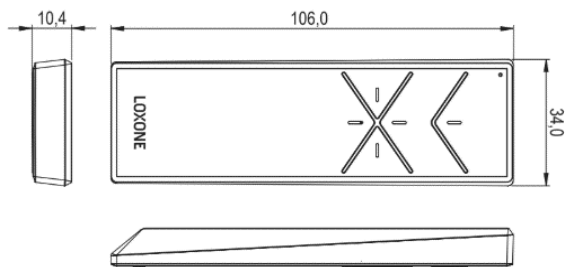

Packmaß	123,5x84x27mm / 4,86x3,31x1,06" (LxBxH)
---------	---

Zertifizierungen & Standards

Schutzart	IP20
-----------	------

Zertifizierungen



Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

Veröffentlicht von Loxone Electronics GmbH

Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com